



Type
179120



Zeit/Strom-Kennlinien
Time-Current Characteristics

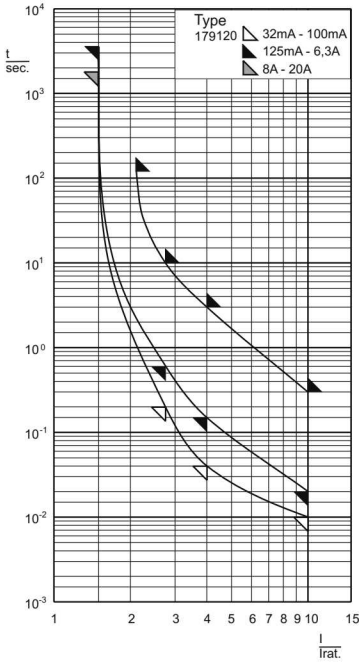

Abmessungen
Dimensions



Aufbau / Construction

Glasrohr / glass tube

durchsichtig / transparent

Kontaktkappen / end caps

Messing, vernickelt / brass, nickel-plated

Schmelzeitgrenzwerte / Fusing time limits

Bemessungsstrom Rated Current	1,5 I _n		2,1 I _n		2,75 I _n		4 I _n		10 I _n	
	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.
32mA - 100mA	1h	2 min	200 ms	10 s	40 ms	3 s	10 ms	300 ms		
125mA - 6,3A	1h	2 min	600 ms	10 s	150 ms	3 s	20 ms	300 ms		
8 A - 20A	30 min	2 min	600 ms	10 s	150 ms	3 s	20 ms	300 ms		

IEC 60127-2/3 EN 60127-2/3 VDE 0820-2/3	5 x 20 mm	250 V	T träge time-lag
---	------------------	-------	------------------------

Artikel-Nr. Article-no.	Bemessungsstrom Rated Current	Bemessungs-Ausschaltvermögen Rated Breaking Capacity	Spannungsfall Voltage Drop	Leistungsabgabe Power Dissipation (@1,5 I _n)	Schmelzintegral I ² t _s Value	Approbationen Approvals		
			mV	W	A ² s	Semko	VDE	UL rec.
179120.0032	32mA	35 A @ AC 250 V	3000	0,2	0,010	✓	✓	✓
179120.004	40mA	35 A @ AC 250 V	2000	0,2	0,020	✓	✓	✓
179120.005	50mA	35 A @ AC 250 V	1500	0,2	0,035	✓	✓	✓
179120.0063	63mA	35 A @ AC 250 V	1000	0,2	0,05	✓	✓	✓
179120.008	80mA	35 A @ AC 250 V	800	0,2	0,12	✓	✓	✓
179120.01	100mA	35 A @ AC 250 V	700	0,3	0,16	✓	✓	✓
179120.0125	125mA	35 A @ AC 250 V	600	0,3	0,24	✓	✓	✓
179120.0160	160mA	35 A @ AC 250 V	600	0,3	0,4	✓	✓	✓
179120.02	200mA	35 A @ AC 250 V	500	0,3	0,7	✓	✓	✓
179120.025	250mA	35 A @ AC 250 V	400	0,3	1,4	✓	✓	✓
179120.0315	315mA	35 A @ AC 250 V	140	0,2	0,35	✓	✓	✓
179120.04	400mA	35 A @ AC 250 V	130	0,2	0,49	✓	✓	✓
179120.05	500mA	35 A @ AC 250 V	120	0,2	0,9	✓	✓	✓
179120.063	630mA	35 A @ AC 250 V	110	0,2	1,4	✓	✓	✓
179120.07	700mA	35 A @ AC 250 V	140	0,3	1,6			
179120.08	800mA	35 A @ AC 250 V	100	0,3	3,2	✓	✓	✓
179120.1	1A	35 A @ AC 250 V	90	0,3	6,5	✓	✓	✓
179120.125	1,25A	35 A @ AC 250 V	80	0,3	5,0	✓	✓	✓
179120.14	1,4A	35 A @ AC 250 V	80	0,4	5,2			
179120.15	1,5A	35 A @ AC 250 V	80	0,4	8,5			
179120.16	1,6A	35 A @ AC 250 V	80	0,4	10	✓	✓	✓
179120.2	2A	35 A @ AC 250 V	80	0,5	20	✓	✓	✓
179120.25	2,5A	35 A @ AC 250 V	80	0,6	26	✓	✓	✓
179120.315	3,15A	35 A @ AC 250 V	80	0,6	44	✓	✓	✓
179120.35	3,5A	35 A @ AC 250 V	80	0,8	50			
179120.4	4A	40 A @ AC 250 V	80	0,8	72	✓	✓	✓
179120.5	5A	50 A @ AC 250 V	80	1,2	130	✓	✓	✓
179120.63	6,3A	63 A @ AC 250 V	70	1,3	230	✓	✓	✓
179120.8	8A	80 A @ AC 250 V	70	1,8	240			
179120.10	10A	100 A @ AC 250 V	70	2,4	380			
179120.12,5	12,5A	125 A @ AC 250 V	70	3,0	650			
179120.16	16A	160 A @ AC 250 V	70	3,2	1300			
179120.20	20A	200 A @ AC 250 V	70	3,5	2200			

Type	Abk. Abbr.	Beschreibung Description
179120	-	100 Stück / 100 Pieces (10 x 10)
	IP	1.000 Stück Industrieverpackung / 1.000 pieces industrial packs
	FC	1.000 Stück mit Farbcode / 1.000 pieces with colour code
	AK	mit montierten Aufsteckkappen/ with assembled push-on caps
z.B./eg.	179120.125IP	